


Technical Specification:

| | | | | |
|-----------------------|--|--------------|-------------------|--|
| Model | DTI 9611 | DTI 7211 | DTI 4911H | DTI 4811 |
| Size(HxWxD)(mm) | 96 X 96 X 42 | 72 X 72 X 60 | 48X 96 X 85 | 48X48X70 |
| Panel Cut-out | 92 X 92 | 68x68 | 44X92 | 44X44 |
| Display | 4 Digit Seven Segment 0.56",RED | | | 3 Digit Seven Segment 0.56",RED |
| Input | TC-J (0 To 600°C) & TC-K (0 To 1200°C) OR PT-100 (-50 °C to 400 °C) (Factory Set) | | | TC-J (0 To 600°C),TC-K(0 To 950°C) OR PT-100 (-50 °C to 400 °C) |
| Supply | 230V AC, 50 / 60 Hz, Approx. 4VA | | | 100 to 250V AC, 50-60Hz Approx. 4 VA @ 230V AC MAX |
| Protection Level | IP-65(Front side) AS per IS/IEC 60529:2001 | | | |
| Operating Temperature | 0°C To 55°C | | Relative Humidity | Up to 95% RH Non Condensing |

Parameter Menu:

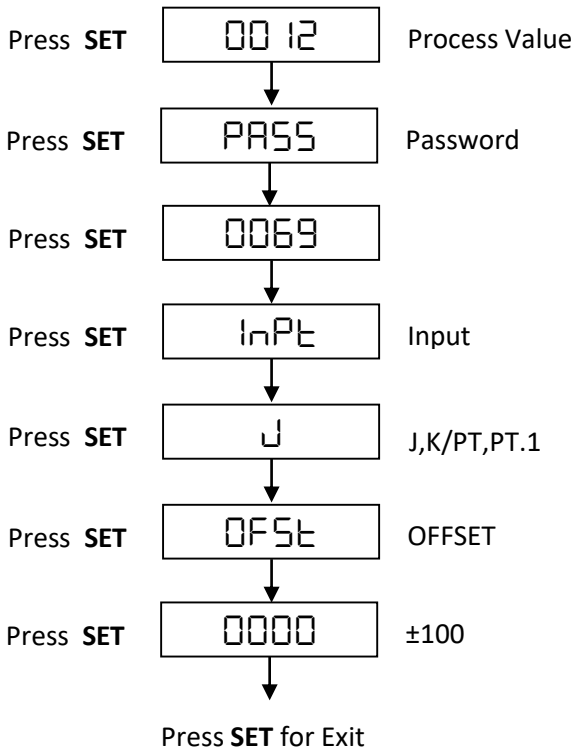

Key Operations:

- Press SET Key to enter in programming mode.
- Press SET Key to go to next parameter.
- Use UP (↑) Or Down (↓) Key to change value of parameter.