


Technical Specification:

Display	4 Digit Seven Segment , 4.0" Red LED Display		
Size (mm)	173(H)x400(W)x60(D)		
Input	Humidity Sensor		
Range	0-100% RH ($\pm 1\%$ of FSD ± 1 RH(FSD: full scale deflection))		
Supply	100 to 250V AC, 50 / 60 Hz, Approx. 4VA		
Protection Level	IP-65(Front side) AS per IS/IEC 60529:2001		
Operating Temperature	0°C To 55°C	Relative Humidity	Up to 95% RH Non Condensing

Key Operations:

- Press **SET** Key to enter in programming mode.
- Press **SET** Key to go to next parameter.
- Use **Up Or Down** key to change value of parameter.
- Press **ENT** Key to save change in setting

Configuration Menu:

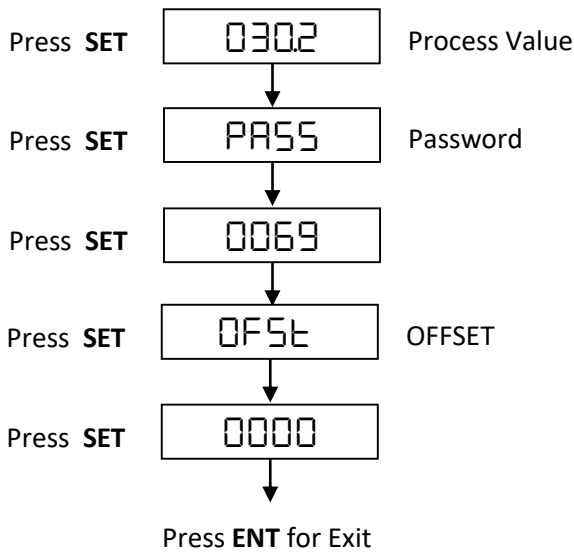

NOTE:

- 1) 1 Relay / 2 Relay (Optional)
 - 2) 24 VDC SSR @30mA (Optional)
 - 3) RS-485 (Modbus RTU) (Optional)
- available as per requirement.