

JUMBO INDICATOR

JUMBO DISPLAY INDICATORS

Single & Double Side



MODEL	UTi-2000/UTi 2000A	UTi-4000/UTi-4000A	UTi-8000/UTi-8000A
Dimension (HxWxD) mm	125 X 235 X 55	180 X 400 X 60	280 X 600 X 60
INPUT	Sensor J/K/PT-100 2W/3W (Configurable)		
OUTPUT	Range J (0°C - 400°C), K (0°C - 1200°C), PT-100 (-99.9°C - 400.0°C)		
SPECIFICATION	Output 1 1Relay / 2 Relay for Alarm (Optional)		
	Accuracy ±1% of FSD		
	Supply 100-250V AC, 50/60 Hz		

JUMBO DISPLAY INDICATORS

Single & Double Side



MODEL	PI-2000/PI-2000A	PI-4000/PI-4000A	PI-8000/PI-8000A
Dimension (HxWxD) mm	125 X 235 X 55	180 X 400 X 60	280 X 600 X 60
INPUT	Sensor 0-10V DC/4-20mA / 0-20mA (Configurable)		
OUTPUT	Range -999 to 9999, 0 to 9999 Count		
SPECIFICATION	Output 1 1Relay / 2 Relay for Alarm (Optional)		
	Output 2 24V DC Transmitter Supply for analog input		
	Accuracy ±1% of FSD		
	Supply 100-250V AC, 50/60 Hz, 24V DC (Factory Set)		

Note : Retransmission available as per requirement (PI 2000R)

JUMBO INDICATOR

JUMBO DISPLAY INDICATORS Single & Double Side



MODEL		MSI-2000/MSI-2000A	MSI-4000/MSI-4000A	MSI-8000/MSI-8000A
Dimension (HxWxD) mm		125 X 235 X 55	180 X 400 X 60	280 X 600 X 60
INPUT	Sensor	Pulse Through Encoder/Proximity		
	Range	-999 to 9999, 0 to 9999 Count		
OUTPUT	Output 1	1Relay / 2 Relay for Alarm (Optional)		
	SPECIFICATION	Accuracy ±1% of FSD Supply 100-250V AC, 50/60 Hz		
Note : MPM, RPM, Available				


JUMBO DISPLAY INDICATORS Single & Double Side



MODEL		MHT-2000/MHT-2000A	MHT-4000/MHT-4000A	MHT-8000/MHT-8000A
Dimension (HxWxD) mm		125 X 235 X 55	180 X 400 X 60	280 X 600 X 60
INPUT	Sensor	Humidity Sensor		
	Range	0 to 100% RH for Humidity		
OUTPUT	Output 1	1Relay / 2 Relay for Alarm (Optional)		
	SPECIFICATION	Accuracy ±1% of FSD Supply 100-250V AC, 50/60 Hz		

JUMBO INDICATOR

PROGRAMMABLE JUMBO COUNTER

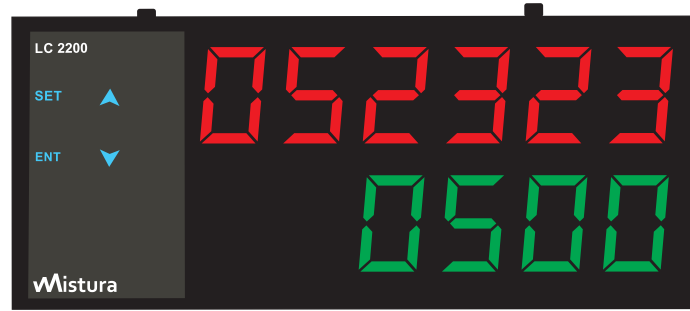

MODEL	LC-2200/2200A	LC-4400/4400A
Dimension (HxWxD) mm	180 X 400 X 60	280 X 600 X 60
Display	Upper: 7 Segment, 6 Digit, 2.25" Red Led Display - Total Meters Lower: 7 Segment, 4 Digit, 2.25" Green Led Display - Meter Per Minute	
INPUT	Sensor	
	NPN/PNP Proximity Switch (Configurable) / Encoder (Factory set)	
RANGE	0-99999.9 / 0-999999 Meter (Configurable)	
OUTPUT	1 Relay, 1C/O, 5A, 230V AC/12V DC SSR Output (Optional)	
SPECIFICATION	MPM Range 999.9 MPM	
	Diameter 0-9999.99 MM	
	Memory Non-Volatile Memory	
	Reset Auto/Manual reset facility & front and back reset facility	
	Supply 85-270V AC, 50/60 Hz SMPS	
	Note RS-485 input available as per request	